


**NOTES:**

1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

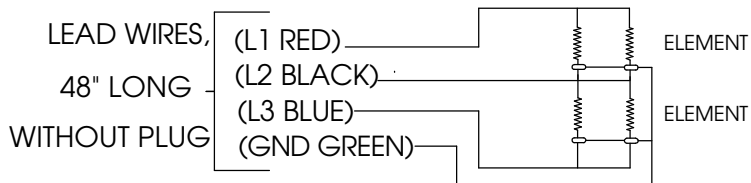

**WIRING DIAGRAM**

NO.	BY	DATE	DESCRIPTION

LEGEND	
CENT	CENTPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE
VOLTS	120/240
WATTS	1080
AMPS	9.00/4.50
CUSTOMER PART #	
DRAWING FILE LOCATION	P:\Engineering\GLOBAL\VF31\DIST\PI\PRT1-P2436DV PRT-P2436DV PATTERN REV 0.SLDOW

LAYERED CONSTRUCTION	
CLOTH	CURED
HEATING ELEMENT	CURED
CLOTH	CURED
TOP	↓
↓	BOTTOM

<b>PROTherm Industries, Inc.</b> <b>3522 CENTRAL PIKE BLDG. 203,</b> <b>HERMITAGE, TN 37076</b> <b>615-834-4044</b>	PROTHERM IND. SRP HEATING BLANKET WITH DV 24" X 36"	DRAWING NUMBER: <b>PRT-P2436DV</b>	SHEET: 1 / 1 REVISION: 0
--	--	------------------------------------	-----------------------------

REVISIONS		DESIGN TEMPERATURE
NO.	BY	DATE

This document contains proprietary information. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS: ± 1/8" FINISH ± 1/8" DO NOT SCALE DRAWING  
 SCALE: 1/4"

DRAWN: SS DATE: 7/16/15  
 TAPE: SS DATE: 7/16/15  
 BOM: SS DATE: 7/23/15  
 APPROVED: LZ DATE: 4/22/13

ORIGINAL SALES ORDER NUMBER: 330037