


COVER REMOVED
IN FRONT VIEW

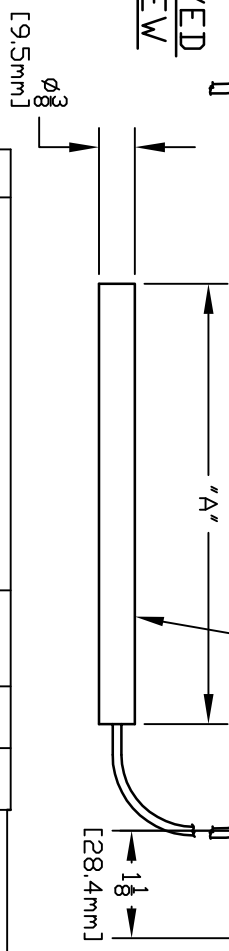

8BS	350 TD 640	175 TD 335	3-1/4'	82.6mm
SBS	-20 TD 80	-30 TD 25	5"	127mm
4BS	25 TD 100	-5 TD 35	6-3/4'	171.5mm
3BS	100 TD 400	35 TD 200	2-1/8'	54.0mm
2BSB	30 TD 250	0 TD 120	2-5/8'	66.7mm
2BSA	-120 TD 100	-85 TD 35	2-5/8'	66.7mm
MODEL	°F		°C	
N.D.	ADJUSTABLE RANGE		BULB °A' DIM.	

R	UPDATED ENCLOSURE. ECN#E4345.	2-17-12	RCI	SJM
P	REPLACED CENELEC APPROVAL WITH ATEX APPROVAL. ECN#E0368	6-17-03	S.R.	LK
N	ADDED CENELEC & CE APPROVALS. ECN#E0009	8-27-02	S.R.	LK
M	UPDATED ENCLOSURE & COVER. ECN#C9734	2/27/02	S.R.	LK
L	REDRAWN, DELETED MODEL 9. DC#25110	3-11-97	S.R.	A.B.
SYM	DESCRIPTION	DATE	DWN	APPD

ORIGINAL DATE 7-29-86
 DRWN PETER WEILLER
 CHKD N.MOCKAY JR.
 APPD RAYMOND MOREAU
 UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES

TITLE	E121	DF 001
REV. C	UNITED ELECTRIC CONTROLS COMPANY WATERTOWN * MASSACHUSETTS	REV. C
DWG NO	A-12121	

DO NOT SCALE THIS DRAWING
 SCALE 1:2

APPROVALS:
 CULUS LISTED
 CLASS I, DIVISIONS 1 & 2, GROUPS B, C & D
 CLASS II, DIVISIONS 1 & 2, GROUPS E, F & G
 CLASS III
 -50°C ≤ Tamb. ≤ +71°C
 CLASS I, ZONE 1, GROUP IIB + H₂ T6
 ENCLOSURE TYPE 4X, 7, 9
 CE 0539 ATEX APPROVED
 II 2 G/D EEx d IIC T6
 -40°C ≤ Tamb. ≤ +71°C
 IP66
 CE COMPLIANT TO
 APPLICABLE DIRECTIVE(S)
 I & M SHEET IMT120

