


Manual Timer Control MODEL SCM-120

FEATURES & BENEFITS

- NEMA 1 enclosure with hinged cover
- Timer adjustable up to 12 hours
- Simple and affordable
- Reliable, manual control
- 120 VAC (operation voltage)
- For use with relay panels (for load switching)
- Terminal block for easy wiring
- UL Listed
- 2 pole relay included
- May be used for snow melting, slab heating, or roof deicing
- Front door easy-lock clasp operates using a coin or large screwdriver.

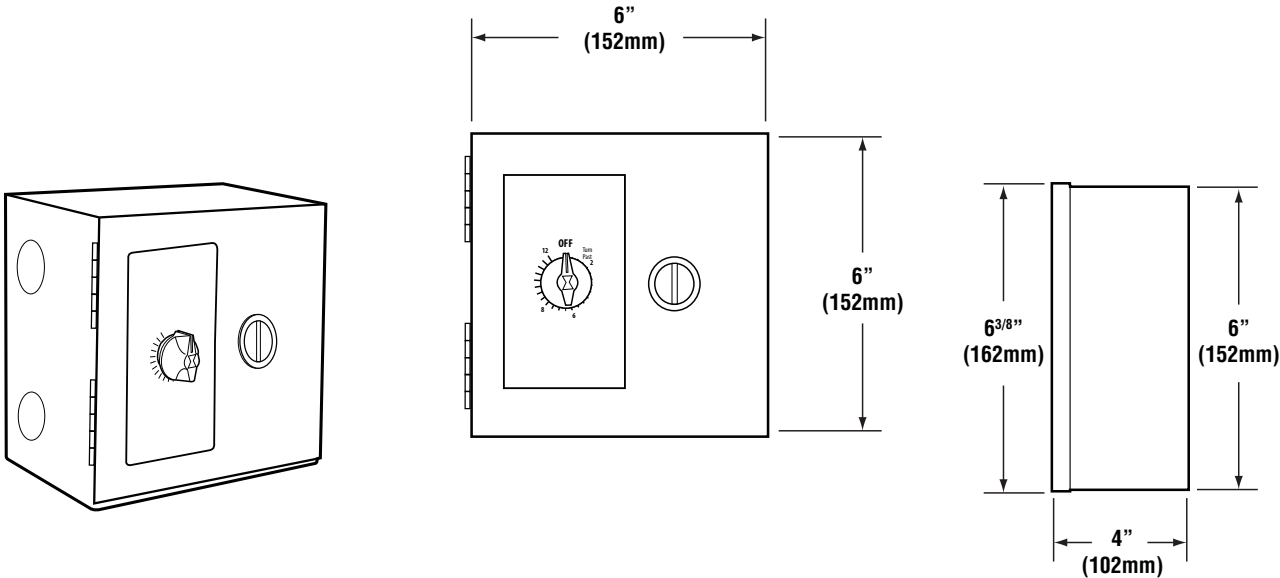

DESCRIPTION


The SCM-120 Manual Timer Control only operates when activated by a user. Equipped with spring-wound timer, the timer is adjustable for up to 12 hours of uninterrupted operation.

The UL Listed Manual Timer includes a NEMA 1 indoor rated enclosure with hinged cover and an easy-lock clasp. 120 VAC control power equipped with labeled block terminals for ease of wiring. UL Listed

Suitable for use with snow melting systems, slab heating, or roof deicing.



WIRING SCHEME INSIDE PANEL

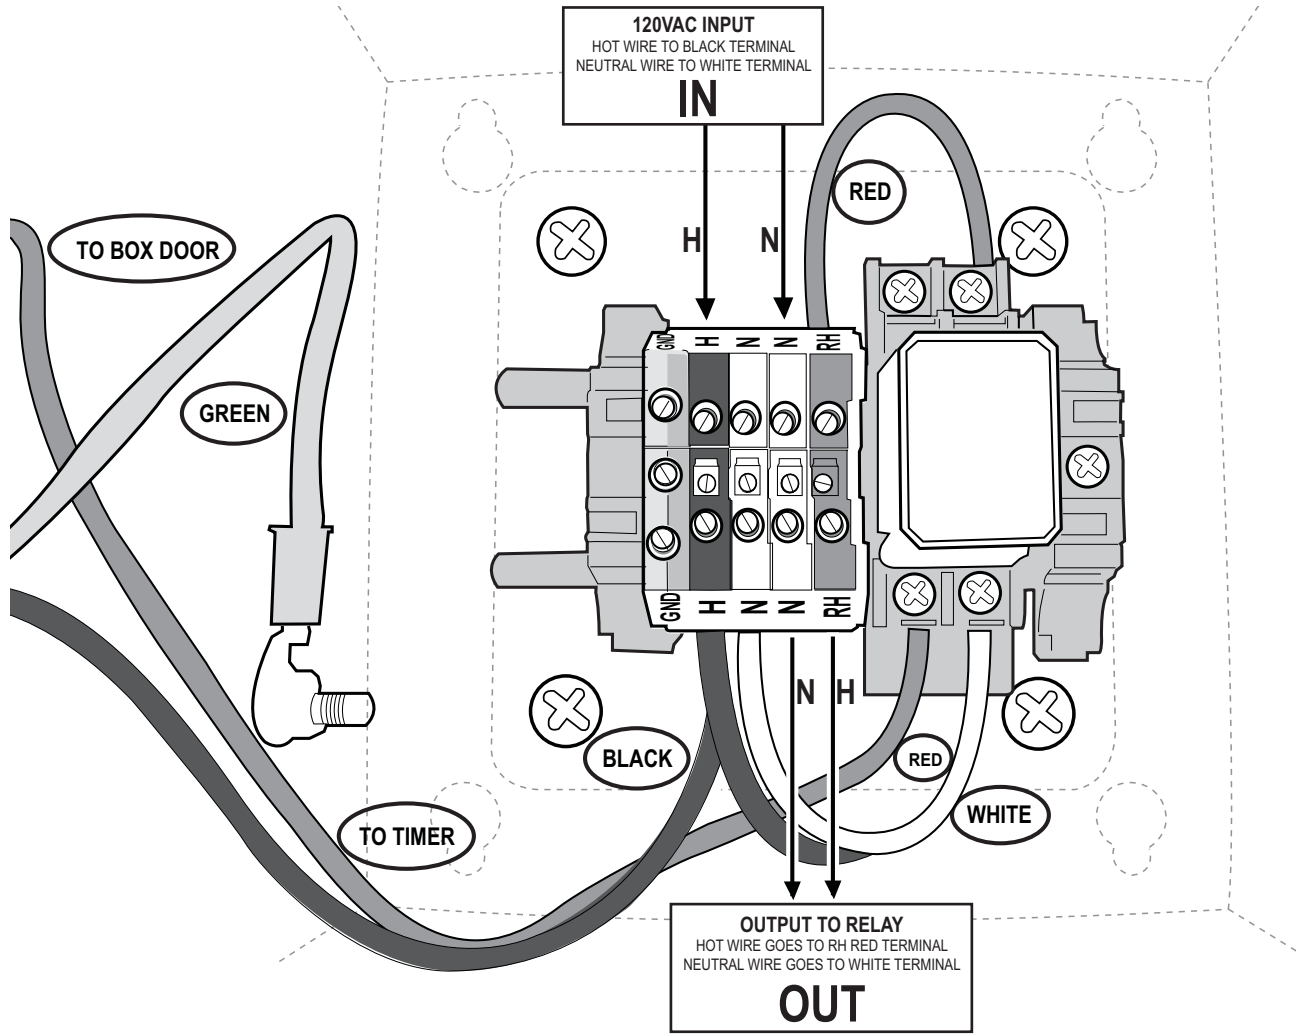

Note 1: Wiring scheme may be different for orders prior to 1-1-2012
(Contact WarmlyYours for assistance)

Note 2: The load switching relay coils will need the neutral from "building power" wired directly (bypassing this manual timer panel)

SPECIFICATIONS

Dimensions 6" (152mm) wide x 6" (152mm) high x 4" (102mm) deep

Weight 5.0 lbs (2.3kg)

*Shipping weight may vary

ORDERING INFORMATION

ORDER NUMBER	DESCRIPTION
SCM-120	MANUAL TIMER CONTROL

LIMITED WARRANTY

2-year limited warranty covering defects in workmanship and materials applies. Contact your Account Manager for complete warranty information.

This document is the property of WarmlyYours. Subject to change without notice.