

- ✓ Full-coverage of drum
- ✓ Highest wattage available
- ✓ Grounded heating element meets NEC 427.23
- ✓ Easy to use digital temperature controller with audible / visual alarm
- ✓ Designed for metal or poly drums
- ✓ CE (see page A-2 for more information)

Temperatures up to



450°F (232°C)

- Silicone impregnated cloth facing and liner
- 1" (25mm) fiberglass insulation
- Digital on/off temperature controller  
 50-450 F (10-232 C) for metal drums  
 50-160 F (10-71 C) for poly drums
- Heated area: FGDH: Lower third  
 FGPDH: Lower two thirds
- Patented grounded heating element
- Dielectric strength over 2000 volts
- Closure: Hook and loop fastener like VELCRO®
- Power cord 6 feet (1.8m) long
- 500 F (260 C) maximum exposure on heating surface
- Designed for indoor use.





Easily control temperatures with the programmable digital controller.  
 Display is mounted on top of controller box for increased visibility and user convenience.

### For Metal Drums (FGDH Series)

Gallon Size	Diameter in (mm)	Total Wattage	Part Number 120VAC	Part Number 240VAC
55	22.3 (565)	1600	FGDHC55150D	FGDHC55240D

### For Poly Drums (FGPDH Series)

Gallon Size	Diameter in (mm)	Total Wattage	Part Number 120VAC	Part Number 240VAC
55	22.3 (565)	770	FGPDHC55120D	FGPDHC55240D

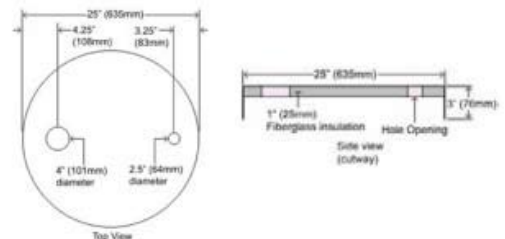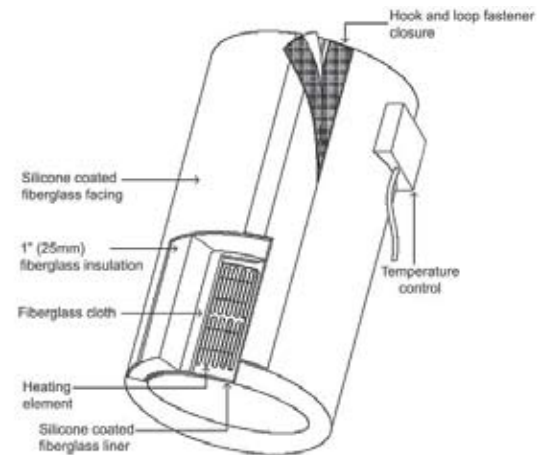

### Accessories

Part Number	Description
FGDC55	Drum Insulation Cover for 55 gallon. Further reduces heat loss.
FGDHSTRIP	6" (152mm) wide strip that expands heater to fit up to a 24.2" (615mm) diameter drum.