FOR APPROVAL

☐ APPROVED DATE

☐ APP'D AS NOTED DATE

☐ NOT APPROVED DATE

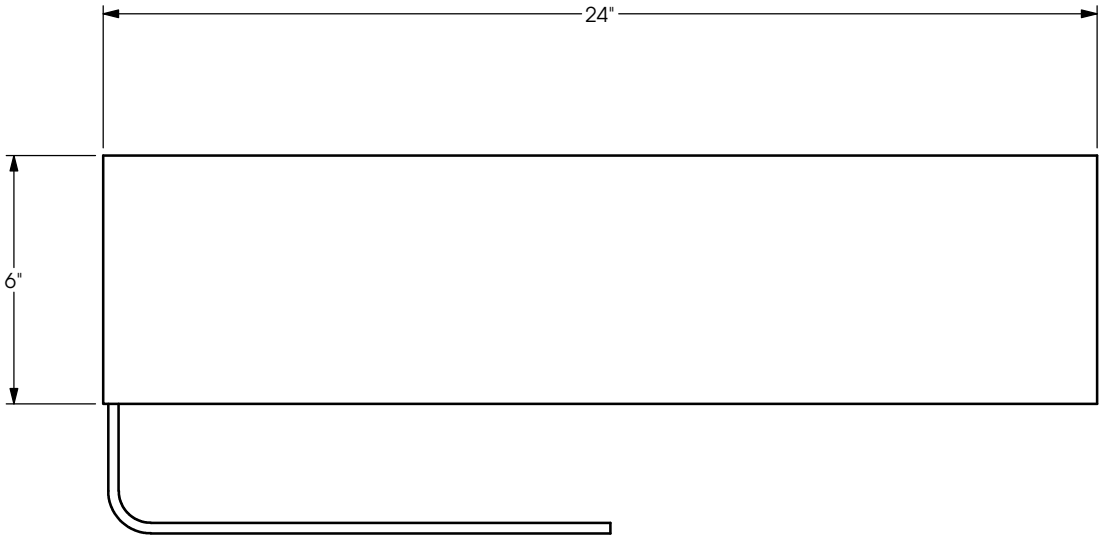

NOTES:

1. USE BARREL SPLICES FOR CONNECTIONS.
2. FINAL CUTTING SHOULD BE DONE USING PATTERN.
3. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
4. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

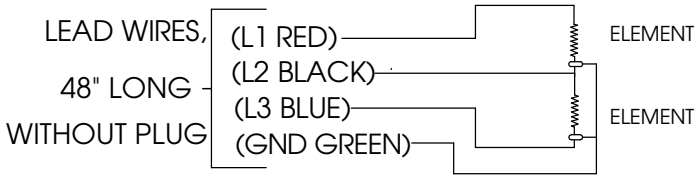

WIRING DIAGRAM

LEGEND	
CENT	CENTIPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

LAYERED CONSTRUCTION

TOP

CLOTH CURED

HEATING ELEMENT

CLOTH CURED

BOTTOM

DESIGN TEMPERATURE

REVISIONS

NO.	BY	DATE	DESCRIPTION

ORIGINAL SALES ORDER NUMBER: 330037

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS:
FIT ± 1/8in
FINISH ± 1/8in
DO NOT SCALE DRAWING

SCALE: 1:4

DRAWN:	SS	DATE:	7/13/15
TAPE:	SS	DATE:	7/13/15
BOM:	SS	DATE:	7/17/15
APPROVED:		DATE:	

VOLTS	120/240
WATTS	360
AMPS	3.00/1.50
CUSTOMER PART #:	
DRAWING FILE LOCATION:	P:\Engineering\GLOBAL\VFS\DIST\P\PRT\-M0624DV\PRT-M0624DV PATTERN REV 0.SLDDRW

PROTHERM IND.
SRL HEATING BLANKET
WITH DV
6" X 24"

DRAWING NUMBER: **PRT-M0624DV**

SHEET 1 / 1

REVISION 0