


NOTES:


- FOR 240V APPLICATION, IGNORE BLACK AND WIRE POWER TO RED & BLUE.
- FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPED TOGETHER FOR 2nd POWER LEAD.

48" LONG
4 CONDUCTOR
SILICONE
OUTER JACKET

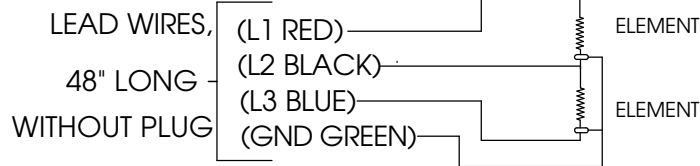

WIRING DIAGRAM

NO.	BY	DATE	DESCRIPTION

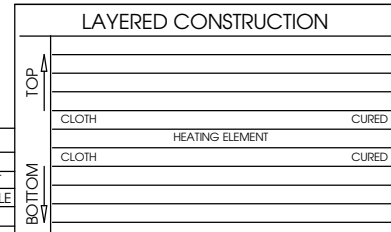

LEGEND	
CENT	CENTPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

VOLTS	120/240
WATTS	1080
AMPS	9.00/4.50
CUSTOMER PART #	
DRAWING FILE	
LOCATION	

This document contains proprietary information. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCE IS:
FIT ± .1/8"
FINISH ± .1/8"
DO NOT SCALE DRAWING
SCALE: 1/4" = 1"

DRAWN: SS	DATE: 7/15/15
TAPE: SS	DATE: 7/15/15
BOM: SS	DATE: 7/17/15
APPROVED: LZ	DATE: 4/22/13

ProTherm Industries, Inc.
3522 CENTRAL PIKE BLDG. 203,
HERMITAGE, TN 37076
615-834-4044

REVISIONS

DESIGN TEMPERATURE

PROTHERM IND.
SRL HEATING BLANKET
WITH DV
12" X 36"

DRAWING NUMBER: **PRT-M1236DV** SHEET 1 OF 1 REVISION 0

ORIGINAL SALES ORDER NUMBER: **330037**