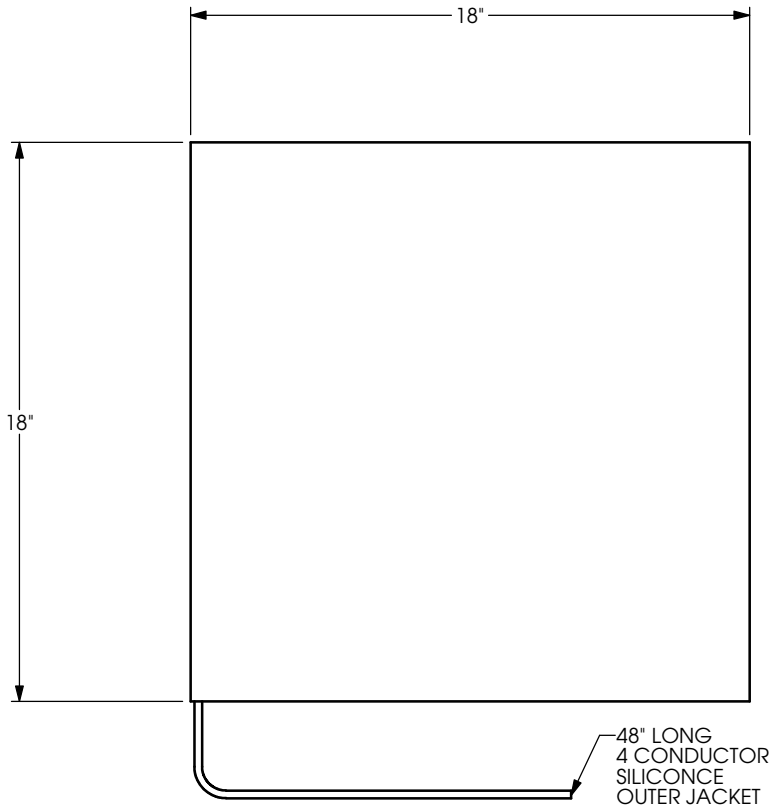

NOTES:

1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

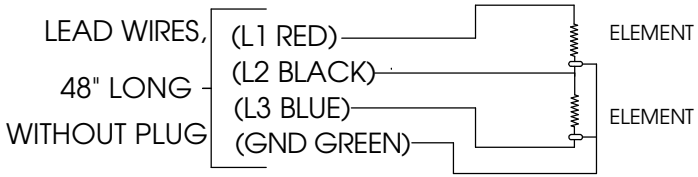

WIRING DIAGRAM

19.44	
18	
16.56	DESIGN TEMPERATURE

REVISIONS

NO.	BY	DATE	DESCRIPTION

This document contains proprietaryinformation. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.

ORIGINAL SALES ORDER NUMBER: 330037

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS: FIT ± 1/8in FINISH ± 1/8in DO NOT SCALE DRAWING

SCALE: 1:4

DRAWN:	SS	DATE:	7/15/15
TAPE:	SS	DATE:	7/15/15
BOM:	SS	DATE:	7/17/15
APPROVED:	LZ	DATE:	7/28/15

ProTherm
Industries, Inc.
3522 CENTRAL PIKE
BLDG. 203,
HERMITAGE, TN 37076
615-834-4044

LEGEND

CENT	CENTIPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

VOLTS	120/240
WATTS	810
AMPS	6.75/3.38
CUSTOMER PART #:	
DRAWING FILE LOCATION:	P:\Engineering\GLOBAL\VFS\DIST\P\PRT\-M1818DV PRT-M1818DV PATTERN REV 0.SLDDRW

LAYERED CONSTRUCTION

TOP

CLOTH — CURED

HEATING ELEMENT

CLOTH — CURED

BOTTOM

PROTHERM IND.
SRL HEATING BLANKET
WITH DV
18" X 18"

DRAWING NUMBER: **PRT-M1818DV**

SHEET 1 / 1

REVISION 0