


**NOTES:**


- 1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
- 2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

48" LONG  
4 CONDUCTOR  
SILICONE  
OUTER JACKET

NO.	BY	DATE	DESCRIPTION

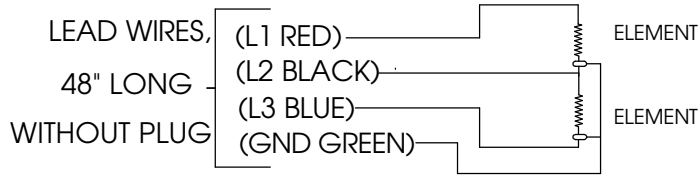

**WIRING DIAGRAM**

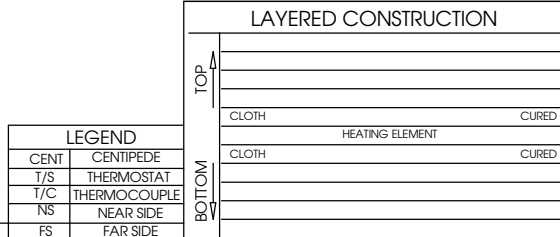

LEGEND	
CENT	CENTPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

VOLTS	120/240
WATTS	360
AMPS	3.00/1.50
CUSTOMER PART #:	
DRAWING FILE:	P:\Engineering\GLOBAL\VFSA
LOCATION:	DIST1.P1.PRT1-P1224DV

PROTHERM IND.  
SRP HEATING BLANKET  
WITH DV  
12" X 24"

DRAWING NUMBER: **PRT-P1224DV**

SHEET 1 OF 1 REVISION 0

DESIGN TEMPERATURE

**REVISIONS**

NO.	BY	DATE	DESCRIPTION

This document contains proprietary information. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.

ORIGINAL SALES ORDER NUMBER: **330037**

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS:  $\pm 1/8"$   
FINISH  $\pm 1/8"$   
DO NOT SCALE DRAWING  
SCALE: 1/4" = 1"

DRAWN: SS DATE: 7/16/15  
TAPE: SS DATE: 7/16/15  
BOM: SS DATE: 7/23/15  
APPROVED: LZ DATE: 7/28/15

**ProTherm Industries, Inc.**  
**3522 CENTRAL PIKE BLDG. 203,**  
**HERMITAGE, TN 37076**  
**615-834-4044**