


NOTES:

1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

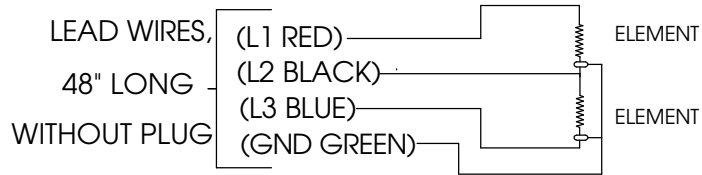

WIRING DIAGRAM

LAYERED CONSTRUCTION		
TOP		
	CLOTH	CURED
	HEATING ELEMENT	
	CLOTH	CURED
BOTTOM		

LEGEND	
CENT	CENTPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

VOLTS	120/240
WATTS	540
AMPS	4.50/2.25

CUSTOMER PART #: P:\Engineering\GLOBAL\VF\DISTL\P1.PRT - P1236DV
DRAWING FILE: PRT-P1236DV PATTERN REV 0.SLDWG
LOCATION:

PROTHERM IND.
SRP HEATING BLANKET
WITH DV
12" X 36"

DRAWING NUMBER: **PRT-P1236DV** SHEET 1 REVISION 0

NO.	BY	DATE	DESCRIPTION

REVISIONS DESIGN TEMPERATURE: _____	This document contains proprietary information. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS: FIT ± 1/8" FINISH ± 1/32" DO NOT SCALE DRAWING	ProTherm Industries, Inc. 3522 CENTRAL PIKE BLDG. 203, HERMITAGE, TN 37076 615-834-4044	ORIGINAL SALES ORDER NUMBER: 330037 APPROVED: LZ DATE: 7/28/15
---	--	---	--	--