


NOTES:

- 1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
- 2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

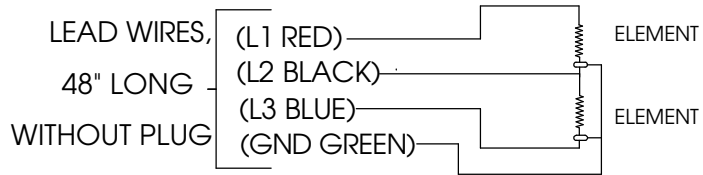

WIRING DIAGRAM

NO.	BY	DATE	DESCRIPTION

LEGEND	
CENT	CENTPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE

LAYERED CONSTRUCTION	
CLOTH	CURED
CLOTH	HEATING ELEMENT
CLOTH	CURED

VOLTS	120/240
WATTS	405
AMPS	3.38/1.69
CUSTOMER PART #	
DRAWING FILE	
LOCATION	

REVISIONS			
NO.	BY	DATE	DESCRIPTION

DESIGN TEMPERATURE	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS:
	FINISH ± 1/32" DO NOT SCALE DRAWING
	SCALE: 1/4" = 1"
	DRAWN: SS DATE: 7/16/15
	TAPE: SS DATE: 7/16/15
	BOM: SS DATE: 7/23/15
	APPROVED: LZ DATE: 7/28/15

ProTherm Industries, Inc.
3522 CENTRAL PIKE BLDG. 203,
HERMITAGE, TN 37076
615-834-4044

PROTHERM IND. SRP HEATING BLANKET WITH DV 18" X 18"	
DRAWING NUMBER: PRT-P1818DV	SHEET 1 OF 1
	REVISION 0

P:\Engineering\GLOBAL\VS\DIST\PI\PRT\PI-P1818DV PRT-P1818DV PATTERN REV 0.SLDW