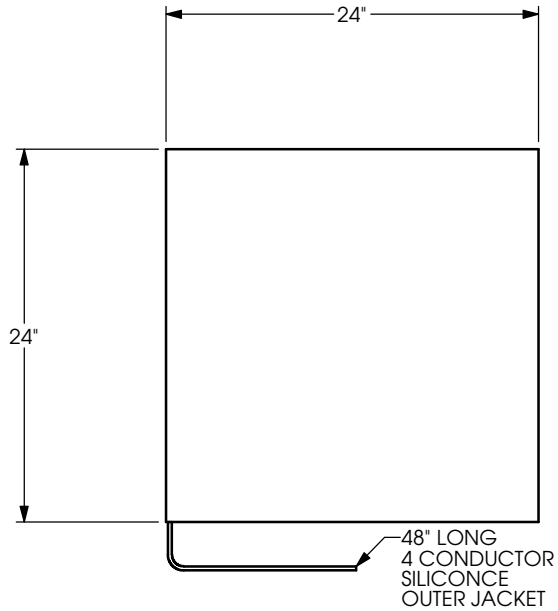

NOTES:

1. FOR 240V APPLICATION, IGNORE BLACK. AND WIRE POWER TO RED & BLUE.
2. FOR 120V APPLICATION, CONNECT POWER TO BLACK. RED & BLUE SHOULD BE JUMPERED TOGETHER FOR 2nd POWER LEAD.

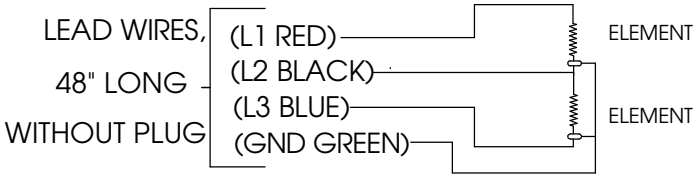

WIRING DIAGRAM

LEGEND	
CENT	CENTIPEDE
T/S	THERMOSTAT
T/C	THERMOCOUPLE
NS	NEAR SIDE
FS	FAR SIDE
VOLTS	120/240
WATTS	720
AMPS	6.00/3.00
CUSTOMER PART #:	
DRAWING FILE LOCATION:	P:\Engineering\GLOBAL\VFS\DIST\P\PRT\-P2424DV PRT-P2424DV PATTERN REV 0.SLDDRW

LAYERED CONSTRUCTION

TOP
CLOTH — CURED
HEATING ELEMENT
CLOTH — CURED
BOTTOM

DESIGN TEMPERATURE

REVISIONS

NO.	BY	DATE	DESCRIPTION

This document contains proprietaryinformation. Any information pertaining to this document is not to be reproduced, transmitted, disclosed or used otherwise on whole or in part without prior written authorization.

ORIGINAL SALES ORDER NUMBER: 330037

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCE IS: FIT ± 1/8in FINISH ± 1/8in DO NOT SCALE DRAWING

SCALE:	1:4		
DRAWN:	SS	DATE:	7/15/15
TAPE:	SS	DATE:	7/15/15
BOM:	SS	DATE:	7/23/15
APPROVED:	LZ	DATE:	42213

ProTherm
Industries, Inc.
3522 CENTRAL PIKE
BLDG. 203,
HERMITAGE, TN 37076
615-834-4044

PROTHERM IND.
SRP HEATING BLANKET
WITH DV
24" X 24"

DRAWING NUMBER: **PRT-P2424DV**

SHEET 1 / 1

REVISION 0