

1660-18911

Ambient Sensing Thermostat




Description

The 1660-18911 thermostat is a watertight, dust tight and corrosion resistant temperature control in a light-weight die cast enclosure with an internal calibrated reference dial and tamper-proof adjustment for outdoor or indoor locations. The liquid-filled thermal system, with its stainless steel sensor stem, provides a very dependable and accurate control system.


Wiring

For heater control, low alarm (close on falling temperature) use COM and NC. For high alarm (close on rising temperature) use COM and NO.

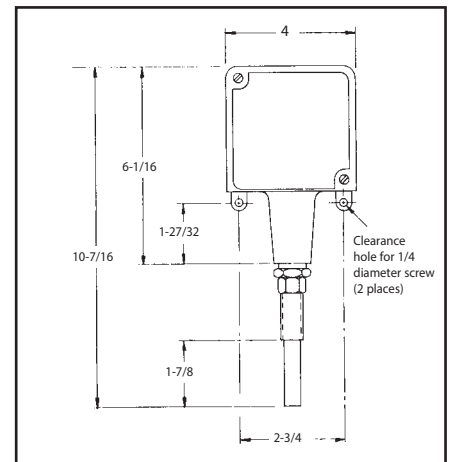

Specifications

Enclosure	Die cast aluminum with polyamid epoxy coating, NEMA 4X; watertight, dust tight and corrosion resistant
Connection	Screw terminals on switch through 1/2-NPT hub
Switch	SPDT UL listed with internal calibrated reference dial and tamper-proof adjustment
Rating	22 amps at 480 VAC
Range	15° – 140°F
Sensor	304 SS sensor stem
Approval	UL listed/CSA certified
Accuracy	±1% of adjustment range

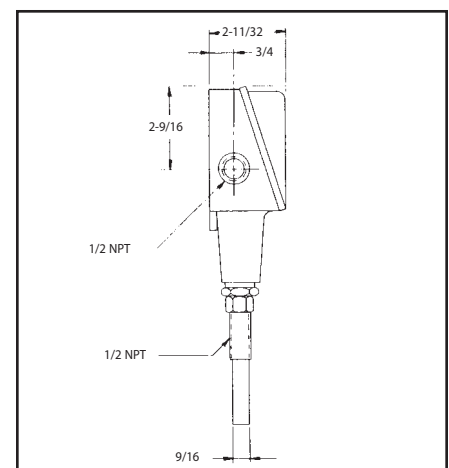

1660-18911

Ambient Sensing Thermostat

Typical installation for a 1660-18911 ambient sensing controller mounted on a pipe.

